


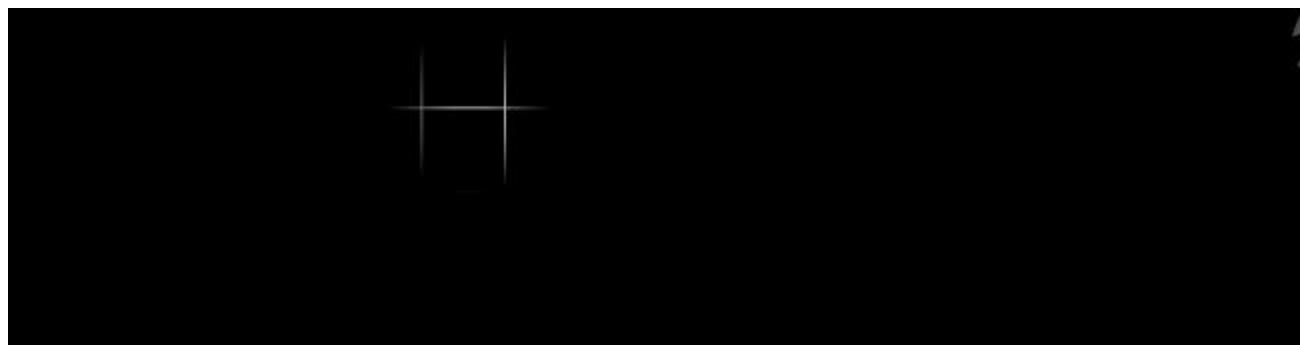

首 页

关于公司

条码产品

自主开发

应用方案

下载中心

条码



条码产品

- 条码扫描器
 - 美国intermec
 - 美国Symbol
 - 意大利Datalogic
 - 台湾Gyoung
 - 美国HHP (honeywell)
 - 日本Opticon
 - 美国Microscan
 - 美国Metrologic
 - 台湾IMC
 - 美国PSC
 - 新大陆nls
 - 日本东研tohken
- 条码打印机
 - 美国Intermec
 - 日本Toshiba-Tec
 - 美国斑马Zebra
 - 日本佐藤Sato
 - 日本Ring
 - 美国Datamax
 - 台湾Godex
 - 台湾TSC
 - 日本西铁城Citizen
 - 日本新盛shinsei
 - 德国CAB
 - 美国科立得Cognitive
- 数据采集终端
 - 美国intermec
 - 美国Symbol
 - 日本Casio
 - 美国Metrologic
 - 台湾Gyoung



关闭

意大利Datalogic条码扫描器 > Datalogic PowerScan XLR条码扫描器



Datalogic PowerScan XLR Bar Code Reader - Handheld Bar Code Rea

The PowerScan Extra Long Range Bar Code Readers have been speci demands of tough industrial applications especially where some distances. With the XLR model you can read 20 mil labels as clo far away as a whopping 36` / 11 m. In any long-range applicatio Bar Code reading of both paper and reflective labels. PSC`s Qua successfully read most dirty, smudged and damaged labels that w

技术参数

General Information

Manufacturer	Datalogic S.p.A
Manufacturer Part Number	0611070-011008-000
Manufacturer Website Address	www.datalogic.com
Brand Name	Datalogic
Product Line	PowerScan
Product Model	XLR
Product Name	PowerScan XLR Bar Code Reader
Product Type	Handheld Bar Code Reader

Technical Information

Connectivity Technology	Wired
Bar Code Symbology Support	• UPC-A • UPC-E • JAN-8

日本keyence		- JAN-13 - EAN-13 - EAN-8 - Code 39 Full ASCII - Code 39 - Codabar - Code 128 - Code 93 - Interleaved 2 of 5 - Standard 2 of 5 - MSI/PLESSEY - Pharmacode 39
福建新大陆		
美国双成		
韩国蓝鸟bluebird		
韩国M3		
无线局域网		
美国intermec		
美国Symbol		
不干胶标签		
激光打印标签		
条码碳带		
IMC系列碳带		
标准腊基碳带		
混合基碳带		
树脂基碳带		
水洗布专用树脂碳带		
- 条码打印软件 - 条码检测仪 - 条码打印机配件		
	Light Source	Laser
	Scan Rate	37 scan/s
	Maximum Scan Resolution	1.40 mm
	Depth of Field	84 mm - 1524 mm@0.38 mm - Cod ?? 701 mm - 1829 mm@1.02 mm 39 ?? ?? 1006 mm - 4.57 m@1.0 Code 39 ?? ?? 2042 mm - 11 m@
	Interfaces/Ports	
	Host Interface	Multi-interface
	Power Description	
	Input Voltage	4 V DC to 14 V DC
	Environmental Conditions	
	Temperature	-30 to 50 Operating ?? ?? -40
	Humidity	5 to 95%
	Physical Characteristics	
	Dimensions	183 mm Height x 68.58 mm Widt
	Weight	281 g
	Miscellaneous	
	Additional Information	Supported Interfaces: Serial Wand Emulation Keyboard Wedge
	Certifications & Standards	Electrical: Gost R UL TUV cUL Emissions: FCC -A BCIQ CNS13438

	EN 55022-B
	AS/NZS 3548
	VCCI-B
	Laser Safety:
	CDRH Class IIIA
	IEC 60825 Class 2
Green Compliance	Yes
Green Compliance	RoHS
Certificate/Authority	

[条码业界新闻](#) | [网站地图](#) | [条码行业动态](#)

版权所有 (C) 2002—2011 上海全亨科技

地址: 上海市浦东大道1097号15号楼4E室 邮编: 200135 邮箱: mail#i

电话: 021-51088451 51088452 传真: 021-50935062

